


## DIMENSIONS

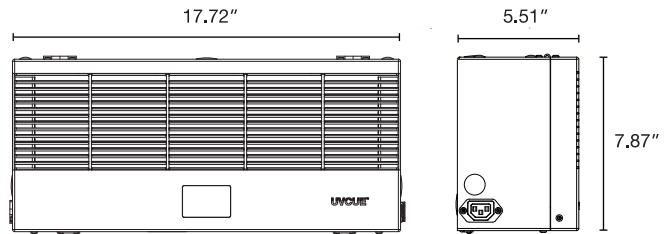

## PRODUCT DESCRIPTION

Upper-room UVC wall mount louvered fixture with high 0.85W fixture-level UVC output, smaller size, fully parabolic reflectors, California ozone emission compliance, and integrated motion sensor

## FEATURES

- Integrated control for occupancy-based operation
- Interlock switch to prevent unwanted UV exposure
- CARB certified (EO Number: G-21-550)
- Silent operation with no fan or blower
- Easy access for maintenance
- Quick installation with included template
- EPA Establishment Number: 99658-CHN-1

## APPLICATIONS

- Educational facilities
- Commercial buildings
- Retail
- Public buildings
- Hospitality
- Gymnasiums
- Cafeteria
- Schools
- Lobbies
- Break rooms

## SPECIFICATIONS

### CONSTRUCTION

Housing	Aluminum
Louver	Powder-coated aluminum

### WEIGHT

Fixture	13.2 lbs
---------	----------

### ELECTRICAL

Model	UA-42A
Power	42 W
UVC Wavelength	254 nm
UVC Output	0.85 W
UVC Lamp	LS-42-A-N
Lamp Life	10,000 h
Control	Integrated microwave motion sensor
Safety Listing	ETL (UL1598)

**NOTE** – When installed, bottom of fixture must be at least 7 feet above the floor. Installer must follow the instructions in the installation manual.



Intertek  
5010029

## ORDERING INFORMATION

### Main Unit

Order Code Example: **UA-42A-G**

UA	-	XX	A	-	X
UPPER AIR		POWER	INPUT VOLTAGE		COLOR
N/A	-	42 = 42 W	A = 120~277 V	-	G = Space Gray

### Parts

Model	Lamps	Ballast
UA-42A	LS-42-A-N	B-42-A-A